



maXium[®] smart Vac

The innovative system for
efficient smoke evacuation



Enhanced visibility and maximum safety at the operating site – surgical smoke is a trouble of the past!

maXium® smart Vac

Enhanced visibility and maximum safety
at the operating site – surgical smoke is a
trouble of the past!

KLS Martin has a huge expertise in laser- and electrosurgery. With the innovative smoke evacuation system maXium® smart Vac, KLS Martin is setting a new standard in the evacuation of surgical smoke.

In the recent years the demand for devices with the possibility to extract the smoke directly from the OR field has grown. The smoke evacuator maXium® smart Vac in combination with our innovative high-frequency generators are reliable partners in your operating theater.

Convince yourself!


The advantages at a glance

- Simultaneous evacuation to high-frequency activation
- Individual parameters can be memorized in the user program of the maXium®
- Extended filter-capacity due to special filter technology
- Two suction hoses can be connected, each individually or simultaneously
- TURBO mode
- LAP mode
- Obstruction control
- Connection to central suction device possible

maXium® smart Vac

Easy selection and adjustment of parameters

Surgical smoke obscures the view of the surgical field. The maXium® smart Vac reduces smoke gases and offers an optimal view of the surgical site.

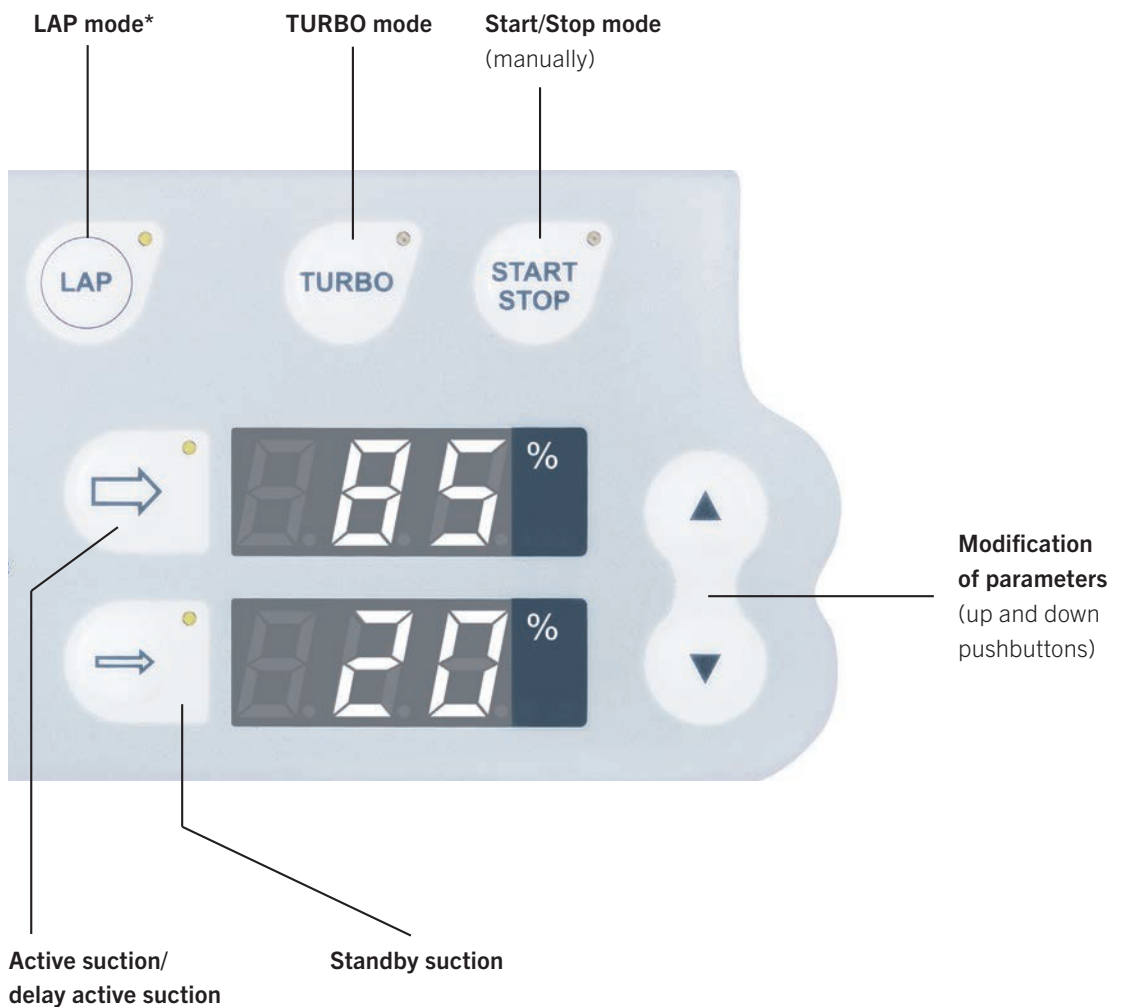



TURBO Mode

Huge quantity of smoke can be eliminated effectively from the OR field.




LAP Mode*

Specially designed for laparoscopic procedures; suction parameters will be automatically limited and the reflux of gas will be reduced to a minimum.



START/STOP

Alternatively, the smoke evacuator can also be activated manually.



Active suction / standby suction

Active suction, stand-by suction and delay time can be selected as required before and during the surgical procedure. These parameters can be easily adjusted by pressing the up and down buttons.

Modification of parameters

(up and down pushbuttons)

* only when ordering maXium® smart Vac with LAP mode

maXium® smart Vac Changeable main filter unit

The specially designed filter system which corresponds to **ULPA*** standard provides safe and effective protection in the operating theater. The large inner-filter-surface provides a long-lasting lifetime.

The main filter unit provides two different connections. Suction tubes with Ø 22 mm as well as with Ø 10 mm can be connected individually or simultaneously.

The filter status is permanently displayed and a necessary change of the main filter is indicated on the indicator in time.

If required, the smoke evacuator can be connected to a central-OR-suction system. This optional feature can be ordered on request.



* ULPA = Ultra Low Penetration Air

maXium® smart Vac
maXium®
maXium® smart Cart

**User-friendly set-up of parameters via
MCB (Martin-Communication-Bus)**

The parameters for the maXium® smart Vac can be selected and adjusted through the HF generator maXium® and memorized in the user-program.*

The HF generator as well as the smoke evacuation system can be positioned on a specially designed trolley. Alternatively, the system can be placed on a pendant.



* Please consider that maXium® HW06 and software V3.398 are required.

Ordering information for smoke evacuation system **maXium®** smart Vac and accessories

| Technical specifications | | | |
|--------------------------|--|--------------------------------|---------|
| Power supply | 100 - 240 V ± 10%; 50/60 Hz | | |
| Appliance air flow | > 750 l/min | | |
| Power input | 220 - 240 V, max. 900 VA; 100 V, 110 V, 120 V, 127 V, max. 600 VA | | |
| Activation | Automatic activation, front-panel button, optionally by foot switch Mains current detection (adapter) | | |
| Interfaces | Foot switch, MCB (Martin Communication Bus), USB | | |
| Main filter | ULPA efficient 99.9995% @ 0.1 - 0.2 µm for tube size Ø 22 mm and Ø 10 mm | | |
| Filter lifetime | 40 hours. Filter change will be indicated at the unit | | |
| Weight | Smoke evacuation system maXium® smart Vac, | 220 - 240 V, | 10.6 kg |
| | Smoke evacuation system maXium® smart Vac with LAP mode, | 220 - 240 V, | 11.6 kg |
| | Smoke evacuation system maXium® smart Vac, | 100 V / 110 V / 120 V / 127 V, | 12.6 kg |
| | Smoke evacuation system maXium® smart Vac with LAP mode, | 100 V / 110 V / 120 V / 127 V, | 13.6 kg |
| EMI | Keeps limits according to EN 55011 and IEC 60601-1-2, immunity according to IEC 801 | | |
| Dimensions | Width | 390 mm | |
| | Height | 218 mm | |
| | Depth | 460 mm (with main filter) | |

| Item No. | Product description |
|--------------|--|
| 80-062-00-04 | Smoke evacuation system maXium® smart Vac with LAP-Mode , 220 V incl. main filter unit (item 80-060-01-04) |
| 80-062-00-10 | Smoke evacuation system maXium® smart Vac with LAP-Mode , 100 V incl. main filter unit (item 80-060-01-04) |
| 80-062-01-04 | Smoke evacuation system maXium® smart Vac, 220 V incl. main filter unit (item 80-060-01-04) |
| 80-062-01-10 | Smoke evacuation system maXium® smart Vac, 100 V incl. main filter unit (item 80-060-01-04) |

| Item No. | Individual components |
|--------------|--|
| 80-060-01-04 | Main filter unit for smoke evacuator maxium® smart Vac (ULPA standard) |
| 80-811-50-04 | Single-pedal foot switch for manual activation |
| 80-060-06-04 | Adapter for connection to a central suction (Ø 22 mm) |

| Item No. | Connection options for automatic operation (HF generator or laser) |
|--------------|--|
| 80-091-01-04 | MCB connection cable (maXium® and maXium® smart Vac) |
| 80-060-05-04 | Adapter for mains current detection |
| 76-100-60-04 | Extension cable for smoke evacuation with laser |

| Item No. | Accessories and consumables |
|--------------|---|
| 80-060-04-04 | Air hose, sterile, Ø 10 mm with Luer-Lock connection, 2.5 m long, (e.g. for connection of trocar) (packaging unit = 20 pieces) |
| 79-225-11-04 | Prefilter (HEPA standard), Ø 22 mm, sterile, single-use (packaging unit = 20 pieces) |

KLS Martin Group

KLS Martin Australia Pty Ltd.

Sydney · Australia
Tel. +61 2 9439 5316
australia@klsmartin.com

KLS Martin do Brasil Ltda.

São Paulo · Brazil
Tel. +55 11 3554 2299
brazil@klsmartin.com

KLS Martin Medical (Shanghai) International Trading Co., Ltd

Shanghai · China
Tel. +86 21 5820 6251
info@klsmartin.com

KLS Martin India Pvt Ltd.

Chennai · India
Tel. +91 44 66 442 300
india@klsmartin.com

KLS Martin Italia S.r.l.

Milan · Italy
Tel. +39 039 605 67 31
info@klsmartin.com

KLS Martin Japan K.K.

Tokyo · Japan
Tel. +81 3 3814 1431
info@klsmartin.com

KLS Martin SE Asia Sdn. Bhd.

Penang · Malaysia
Tel. +604 261 7060
malaysia@klsmartin.com

KLS Martin de México, S.A. de C.V.

Mexico City · Mexico
Tel. +52 55 7572 0944
mexico@klsmartin.com

KLS Martin Nederland B.V.

Huizen · Netherlands
Tel. +31 35 523 45 38
info@klsmartin.com

KLS Martin SE & Co. KG

Moscow · Russia
Tel. +7 499 792 76 19
russia@klsmartin.com

KLS Martin Taiwan Ltd.

Taipei · Taiwan
Tel. +886 2 2325 3169
taiwan@klsmartin.com

KLS Martin SE & Co. KG

Dubai · United Arab Emirates
Tel. +971 4 454 16 55
middleeast@klsmartin.com

KLS Martin UK Ltd.

Reading · United Kingdom
Tel. +44 118 467 1500
info.uk@klsmartin.com

KLS Martin LP

Jacksonville · Florida, USA
Tel. +1 904 641 77 46
usa@klsmartin.com

KLS Martin SE Asia Sdn. Bhd.

Hanoi · Vietnam
Tel. +49 7461 706-0
info@klsmartin.com

Do you know how to get all important information
about the KLS Martin Energy Devices?

Please download KLS Martin App Energy Devices!
The App is available for Android and iOS.



<https://itunes.apple.com/de/app/klsmartin-energy-devices/id1198171415?l=de&ls=1&mt=8>



<https://play.google.com/store/apps/details?id=com.klsmartin.energydevices>

KLS Martin SE & Co. KG

A company of the KLS Martin Group

KLS Martin Platz 1 · 78532 Tuttlingen · Germany
PO Box 60 · 78501 Tuttlingen · Germany
Tel. +49 7461 706-0 · Fax +49 7461 706-193
info@klsmartin.com · www.klsmartin.com